



LINOLEUM

gerflor.com



Gerflor[®]
theflooringgroup



Organic

Bio degradable

Wellness

**ECO-FRIENDLY
PRODUCT**

DLW LINOLEUM

A NATURAL CHOICE



Organic product



High pedestrian and mechanical traffic resistance



Large choice of colors and designs




Acoustic comfort up to 18dB

Linoleum is the only resilient flooring made from **renewable** and **bio degradable** raw materials.

DLW linoleum is made of 98% **organic** or **mineral based** materials, is natural, warm to the feet, **antibacterial** thanks to linseed oil and has an almost **neutral CO₂ balance**.

Healthy and **durable**, DLW linoleum is certified by numerous eco labels and is a long time preferred solution in sensitive applications, such as kindergartens, schools and hospitals.

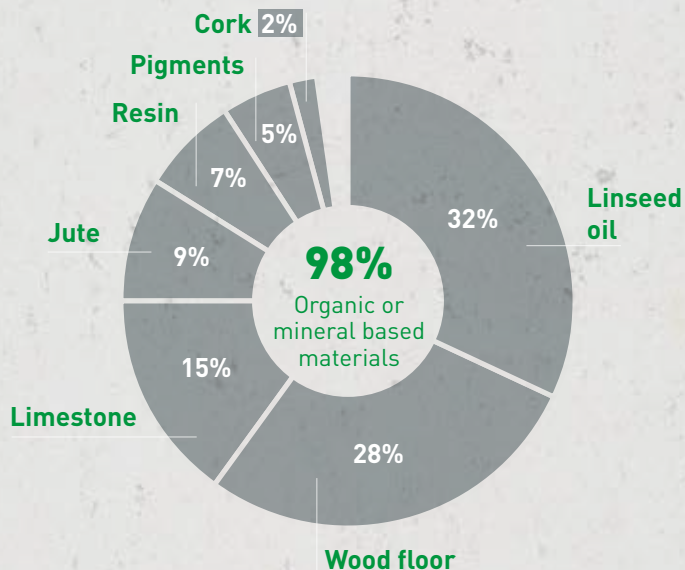

www.blauer-engel.de/uz120



LINOLEUM **COMPACT**

Marmorette	06
Colorette	10
Lino Art Star	12
Lino Art Metallic	12
Lino Art Nature	12
Lino Art Urban	13
Uni Walton	14
Granette	14

LINOLEUM **ACOUSTIC**

Marmorette Acoustic	20
Marmorette AcousticPlus	20
Colorette AcousticPlus	21
Lino Art Nature AcousticPlus	21

LINOLEUM **TECHNIC**

Linodur	25
Linodur LCH	25
Marmorette LCH	25

LINOLEUM **SPORT**

Linodur Sport	30
Nature Sport	30
Colorette Sport	31

FINISHES	35
----------	----

CLEANING LINOLEUM FLOORS	38
-----------------------------	----

LINOLEUM COMPACT



LINOLEUM COMPACT

MARMORETTE



LPX

Prod. code:
121

2.5mm

All colors

● Thickness
2.0mm

Prod. code:
821

▲ Thickness
3.2mm

Prod. code:
521

PUR

Prod. code:
125

2.5mm

All colors



NCS: S 2502-R

0155 Smoked Pearl



NCS: S 4005-R80B

0055 Ash Grey ●▲



NCS: S 3000-N

0052 Flint Grey



NCS: S 4502-R

0056 Foggy Blue ●▲



NCS: S 5502-B

0050 Quartz Grey ●▲



NCS: S 4502-B

0053 Ice Grey ●▲



NCS: S 6502-Y

0158 Tabac Grey



NCS: S 7502-B

0059 Plumb Grey ●▲



NCS: S 5500-N

0159 Alumino Grey



NCS: S 8502-Y

0180 Carbon Grey



NCS: S 8000-N

0096 Midnight Grey



NCS: S 8000-N

0160 Industrial Grey ●



NCS: S 2050-Y30R

0173 Melon Orange



NCS: S 2020-Y30R

0098 Desert Beige ●



NCS: S 1510-Y20R

0145 Banana White



NCS: S 2010-Y10R

0045 Sand Beige ●



NCS: S 3050-Y40R

0073 Spicy Orange



NCS: S 2040-Y10R

0076 Pale Yellow



NCS: S 2020-Y20R

0040 Light Sahara ●



NCS: S 3010-Y30R

0146 Beeswax Beige



NCS: S 2050-Y50R

0174 Physalis Orange



NCS: S 1050-Y20R

0072 Golden Yellow



NCS: S 2030-Y30R

0070 Rocky Brown ●▲



NCS: S 5010-Y70R

0003 Dark Brown



NCS: S 2075-Y60R

0117 - Mandarin Orange



NCS: S 1080-Y20R

0172 Papaya Orange



NCS: S 4030-Y30R

0140 Leather Brown



NCS: S 8010-Y30R

0108 Mokka Brown

LINOLEUM COMPACT

MARMORETTE



2.5mm

Prod. code:
121

All colors

● Thickness
2.0mm

Prod. code:
821

▲ Thickness
3.2mm

Prod. code:
521



2.5mm

Prod. code:
125

All colors



NCS: S 4020-R90B

0023 Dusty Blue ●▲



NCS: S 4040-R80B

0049 Royal Blue ▲



NCS: S 2060-Y90R

0048 Cranberry Red



NCS: S 2050-Y60R

0019 Sunset Orange



NCS: S 5020-R90B

0022 Autumn Blue ▲



NCS: S 5040-R80B

0148 Ink Blue




NCS: S 4050-Y90R

0018 Lobster Red



NCS: S 3050-Y60R

0115 Rusty Orange



NCS: S 4030-R90B

0026 Sky Blue



NCS: S 7020-R80B

0149 Dark Blue



NCS: S 1580-Y80R

0018 Chili Red



NCS: S 3050-Y60R

0019 Terracotta



NCS: S 3040-Y90R

0008 Chestnut



NCS: S 2030-Y50R

0075 Light Aurora



NCS: S 2020-G50Y

0130 Antique Green



NCS: S 3020-G10Y

0020 Mild Green



NCS: S 3030-G30Y

0100 Frog Green



NCS: S 4020-G10Y

0043 Leaf Green



NCS: S 4020-B50G

0099 Grey Turquoise



NCS: S 2060-G60Y

0132 Lime Green



NCS: S 6030-G30Y

0041 Avocado Green



NCS: S 4050-B40G

0129 Curacao Petrol

LINOLEUM COMPACT

COLORETTE



NCS: S 2500-N

0052 Oxid Grey




NCS: S 6010-Y10R

0043 Light Mud



NCS: S 1070-Y

0001 Banana Yellow



NCS: S 0565-G50Y

0132 Lime Green



NCS: S 3502-B

0058 Aluminium Grey




NCS: S 3005-Y20R

0012 Light Beige



NCS: S 1070-Y30R

0171 Sunrise Orange



NCS: S 3050-G20Y

0006 Vivid Green



NCS: S 5502-B

0059 Stone Grey




NCS: S 2030-Y20R

0071 Straw Beige



NCS: S 2070-Y50R

0170 Kumquat Orange



NCS: S 3040-R80B

0004 Bluebird



NCS: S 6502-B

0080 Elephant Grey



NCS: S 2040-Y20R

0073 Sand Yellow



NCS: S 0580-Y90R

0118 Power Red



NCS: S 2060-B

0123 Poppy Blue



NCS: S 8502-B

0081 Private Black



NCS: S 2050-Y60R

0016 Deep Orange



NCS: S 2050-R30B

0110 Cadillac Pink

COLORETTE



NCS: S 2500-N

0052 Oxid Grey



NCS: S 6010-Y10R

0043 Light Mud



NCS: S 1070-Y

0001 Banana Yellow



NCS: S 0565-G50Y

0132 Lime Green



NCS: S 3502-B

0058 Aluminium Grey



NCS: S 3005-Y20R

0012 Light Beige



NCS: S 1070-Y30R

0171 Sunrise Orange



NCS: S 2050-R30B

0110 Cadillac Pink



NCS: S 5502-B

0059 Stone Grey



NCS: S 6502-B

0080 Elephant Grey



NCS: S 2070-Y50R

0170 Kumquat Orange



NCS: S 0580-Y90R

0118 Power Red




NCS: S 8502-B

0081 Private Black


LINOLEUM COMPACT

LINO ART STAR



Prod. code:
 144

All colors




NCS: S 2050-Y40R

0075 Apricot




NCS: S 1060-Y

0001 Lemon Yellow



NCS: S 2050-G40Y

0030 Lime Green




NCS: S 3030-B10G

0020 Aqua Turquoise




NCS: S 5005-Y20R

0059 Concrete Grey



NCS: S 7500-N

0083 Light Grey



NCS: S 8000-N




0085 Mid Grey



NCS: S 8500-N

0080 Black

LINO ART METALLIC

Prod. code:
 502

All colors



NCS: S 7500-N

0083 Alumino
Light Grey



NCS: S 8010-Y70R




0060 Bronze Warm
Brown



NCS: S 8500-N

0080 Firmament
Black

LINO ART NATURE

Prod. code:
 465

All colors



NCS: S 1010-Y30R

0041 Sand Beige



NCS: S 2020-Y40R

0040 Maple Beige



NCS: S 3020-Y30R

0063 Alder Brown



NCS: S 5020-Y30R

0064 Oak Brown



NCS: S 6020-Y30R

0067 Walnut Brown

LINO ART URBAN **NEW** Available January 2019



NCS: S 3010-G60Y

0552 Silver Grey



NCS: S 3502-Y

0555 Flashy Street Grey



NCS: S 4005-Y20R

0550 Beton Soft Grey



NCS: S 5005-G80Y

0554 Concrete Grey



NCS: S 4005-G70Y

0556 Mud Grey



NCS: S 4005-G90Y

0557 Urban Grey



NCS: S 5010-Y30R

0558 Screed Grey



NCS: S 6502-Y

0560 Bold Grey



NCS: S 5005-G80Y

0551 Flashy Asphalt Grey




NCS: S 5005-Y20R

0559 Vintage Grey




NCS: S 6005-Y20R

0553 Dark Concrete Grey







NCS: S 8500-N

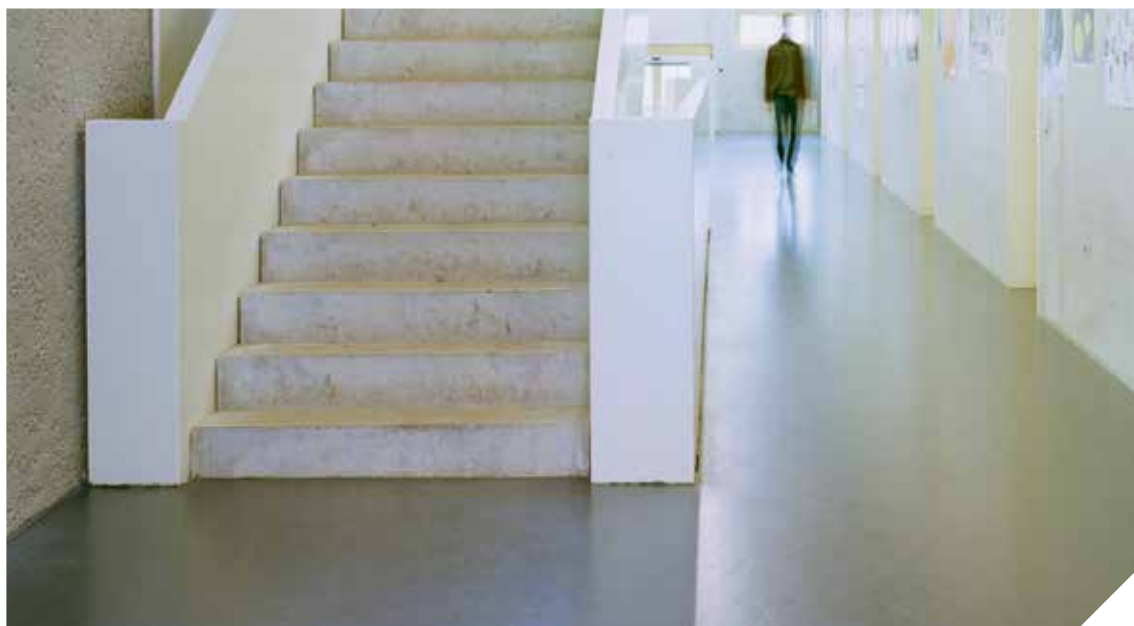
0561 Pitch Black



LINOLEUM COMPACT

UNI WALTON

			
Prod. code: 101	All colors	Prod. code: 208	



NCS: S 2002-Y

0059 Frost Grey



NCS: S 4000-N

0081 Nickel Grey



NCS: S 4005-Y20R

0085 Warm Concrete Grey ▲



NCS: S 2010-Y30R

0043 Neutral Beige




NCS: S 4050-Y60R

0062 Terracotta




NCS: S 5500-N

0082 Broken Grey



NCS: S 6502-Y

0058 Dark Concrete Grey




NCS: S 6020-Y70R

0060 Deep Brown ▲




NCS: S 3060-Y90R

0010 Pompeji Red



NCS: S 9000-N

0080 Black



NCS: S 7500-N

0083 Industrial Grey



NCS: S 8010-B90G

0035 Racing Green



NCS: S 6030-Y90R

0088 Chestnut ▲

GRANETTE

		
Prod. code: 117	All colors	



NCS: S 5005-Y20R

0064 Stone Beige



NCS: S 4502-R

0151 Asphalt Grey



NCS: S 6005-Y20R

0065 Cashmere Brown



NCS: S 5502-R

0152 Cement Grey




NCS: S 7005-Y50R

0066 Terra Brown



NCS: S 2000-N, S 9000-N

0057 Light Stone



NCS: S 7500-N

0153 Metal Grey



NCS: S 7502-B


0059 Graphite Grey



NCS: S 2000-N, S 9000-N

0058 Coal Black

LINOLEUM COMPACT

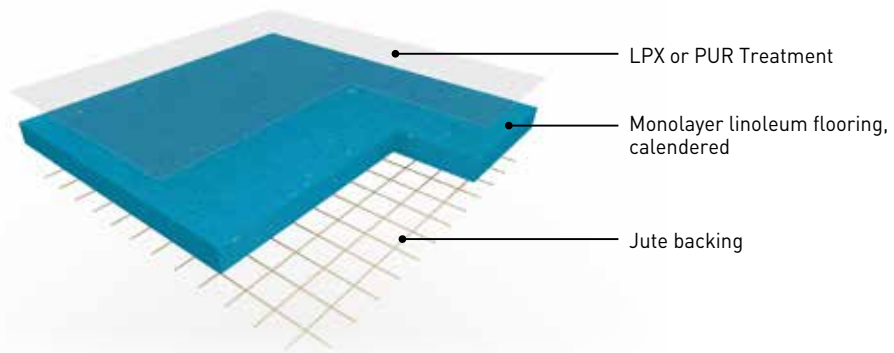

▶ **MARMORETTE** is a linoleum compact floorcovering in sheet, 2m wide, providing excellent resistance to wear and tear in high traffic areas. Its weight is 2400gr/sqm in 2.0mm, 2900gr/sqm in 2.5mm and 3800gr/sqm in 3.2mm. It features a marbled design and is composed of natural materials (linseed oil, wood flour, natural resins, cork flour, limestone, color pigments and jute fabric). LPX surface treatment ensures an excellent durability and an easy maintenance. PUR surface treatment is particularly well resistant against stains. The camouflage welding rod makes the connections between the strips invisible. It resists very well to the incandescent cigarette, is antistatic and antibacterial. The flooring is composed of up to 40% recycled content 100% controlled, is REACH compliant and rated C_{fl}-s1 for fire resistance.



▶ **LINO ART** is a linoleum compact floorcovering in sheet, 2m wide, providing excellent resistance to wear and tear in high traffic areas. Its weight is 2900gr/sqm. It features a striated design (**LINO ART NATURE**), scattered metallic design (**LINO ART METALLIC**), scattered colour chips design (**LINO ART STAR**) or concrete design (**LINO ART URBAN**) and is composed of natural materials (linseed oil, wood flour, natural resins, cork flour, limestone, color pigments and jute fabric). LPX surface treatment ensures an excellent durability and an easy maintenance. The uni welding rod makes the connections between the strips invisible. It resists very well to the incandescent cigarette, is antistatic and antibacterial. The flooring is composed of up to 40% recycled content 100% controlled, is REACH compliant and rated C_{fl}-s1 for fire resistance.



▶ **COLORETTE** is a linoleum compact floorcovering in sheet, 2m wide, providing excellent resistance to wear and tear in high traffic areas. Its weight is 2900gr/sqm. It features a speckled design and is composed of natural materials (linseed oil, wood flour, natural resins, cork flour, limestone, color pigments and jute fabric). LPX surface treatment ensures an excellent durability and an easy maintenance. The uni welding rod makes the connections between the strips invisible. It resists very well to the incandescent cigarette, is antistatic and antibacterial. The flooring is composed of up to 40% recycled content 100% controlled, is REACH compliant and rated C_{fl}-s1 for fire resistance.




▶ **GRANETTE** is a linoleum compact floorcovering in sheet, 2m wide, providing excellent resistance to wear and tear in high traffic areas. Its weight is 2900gr/sqm. It features a granulated design and is composed of natural materials (linseed oil, wood flour, natural resins, cork flour, limestone, color pigments and jute fabric). PUR surface treatment ensures an excellent durability and an easy maintenance. The camouflage welding rod makes the connections between the strips invisible. It resists very well to the incandescent cigarette, is antistatic and antibacterial. The flooring is composed of up to 40% recycled content 100% controlled, is REACH compliant and rated C_{fl}-s1 for fire resistance.



▶ **UNI WALTON** is a linoleum compact floorcovering in sheet, 2m wide, providing excellent resistance to wear and tear in high traffic areas. Its weight is 2900gr/sqm in 2.5mm and 3800gr/sqm in 3.2mm. It features a uni design and is composed of natural materials (linseed oil, wood flour, natural resins, cork flour, limestone, color pigments and jute fabric). LPX surface treatment ensures an excellent durability and an easy maintenance. The uni welding rod makes the connections between the strips invisible. It resists very well to the incandescent cigarette, is antistatic and antibacterial. The flooring is composed of up to 40% recycled content 100% controlled, is REACH compliant and rated C_{fl}-s1 for fire resistance.

LINOLEUM COMPACT

			MARMORETTE LPX	MARMORETTE PUR
DESCRIPTION				
Type of flooring	EN ISO 24011 [EN 548]	-	Linoleum with LPX surface treatment	Linoleum with PUR surface treatment
Pattern	-	-	Marbled	Marbled
Total thickness	EN ISO 24346 [EN 428]	mm	2.0 / 2.5 / 3.2	2.5
Backing	-	-	Jute fabric	Jute fabric
Weight	EN ISO 23997 [EN 430]	g/sqm	2400 / 2900 / 3800	2900
Width of sheet	EN ISO 24341 [EN 426]	cm	200	200
Length of sheet	EN ISO 24341 [EN 426]	m	20-31	20-31
CLASSIFICATION				
Norm / Product specification	-	-	EN ISO 24011	EN ISO 24011
European classification	EN ISO 10874 [EN 685]	class	23 / 34 / 42 / 43 23 / 32 / 41 in 2.0mm	23 / 34 / 42 / 43
Fire rating	EN 13501-1	class	Cfl-s1*	Cfl-s1*
Slip resistance	ASR A1.5 / DIN 51130 – BGR 181	class	R9	R9
Dynamic friction coefficient	EN 13893	-	DS (>0.30)	DS (>0.30)
Impact sound insulation	EN ISO 10140	dB	3 dB / 5 dB / 6 dB	5 dB
PERFORMANCES				
Residual indentation	EN ISO 24343-1 [EN 433]	mm	≤ 0.15	≤ 0.15
Colour fastness	EN ISO 105 - B02	degree	≥ 6	≥ 6
Point contact resistance	VDE 0100	kOhm	> 200	> 200
Static electrical propensity	EN 1815	kV	app. 2.0	app. 2.0
Castor chair test [Type W]	ISO 4918	-	OK	OK
Thermal resistance	EN 12667	sqm,K/W	0.012 / 0.015 / 0.018	0.015
Thermal conductivity	EN ISO 10456 [EN 12 524]	W/(m.K)	0.17	0.17
Surface treatment	-	-	LPX	PUR
Chemical products resistance	EN ISO 26987 [EN 423]	-		Resistance to fat and mineral oil
Antibacterial activity	JIS Z 2801	-		
CE MARKING				
	EN 14041 : 2004 AC : 2006	-		

* Glued according to certificate.

DOP numbers available from your local branch.



Depending on light exposure, the product colour can vary, due to linoleum natural oxidization process. This process is reversible. We recommend that the samples be exposed to sunlight for several hours prior to making a final color choice.

COLORETTE LPX	COLORETTE PUR	UNI WALTON LPX	LINO ART LPX STAR / NATURE / METALLIC / URBAN	GRANETTE PUR
Linoleum with LPX surface treatment	Linoleum with PUR surface treatment	Linoleum with LPX surface treatment	Linoleum with LPX surface treatment	Linoleum with PUR surface treatment
Speckled	Speckled	Uni	STAR: scattered colour chips. NATURE: striated designs. METALLIC: scattered metallic designs. URBAN: Concrete design.	Granulated
2.5	2.5	2.5 / 3.2	2.5	2.5
Jute fabric	Jute fabric	Jute fabric	Jute fabric	Jute fabric
2900	2900	2900 / 3800	2900	2900
200	200	200	200	200
20-31	20-31	20-31	20-31	20-31
EN ISO 24011	EN ISO 24011	EN ISO 24011	EN ISO 24011	EN ISO 24011
23 / 34 / 42 / 43	23 / 34 / 42 / 43	23 / 34 / 42 / 43	23 / 34 / 42 / 43	23 / 34 / 42 / 43
C _{fl-s1*}	C _{fl-s1*}	C _{fl-s1*}	C _{fl-s1*}	C _{fl-s1*}
R9	R9	R9	R9	R9
DS (>0.30)	DS (>0.30)	DS (>0.30)	DS (>0.30)	DS (>0.30)
5 dB	5 dB	5 dB / 6 dB	5 dB	5 dB
≤ 0.15	≤ 0.15	≤ 0.15	≤ 0.15	≤ 0.15
≥ 6	≥ 6	≥ 6	≥ 6	≥ 6
> 200	> 200	> 200	> 200	> 200
app. 2.0	app. 2.0	app. 2.0	app. 2.0	app. 2.0
OK	OK	OK	OK	OK
0.015	0.015	0.015	0.015	0.015
0.17	0.17	0.17	0.17	0.17
LPX	PUR	LPX	LPX	PUR

and short term resistance against diluted acids (LPX) / Excellent resistance against acids and alkaline in high concentration (PUR)

DLW linoleum has an antibacterial activity






LINOLEUM ACOUSTIC



LINOLEUM ACOUSTIC

MARMORETTE ACOUSTIC



0019 Sunset Orange

NCS: S 2050-Y60R



0098 Desert Beige

NCS: S 2020-Y30R




0045 Sand Beige

NCS: S 2010-Y10R



0059 Plumb Grey

NCS: S 7502-B



0053 Ice Grey


NCS: S 4502-B



0023 Dusty Blue

NCS: S 4020-R90B

MARMORETTE ACOUSTICPLUS



0129 Curacao Petrol

NCS: S 4050-B40G



0130 Antique Green

NCS: S 3030-B50G



0022 Autumn Blue

NCS: S 5020-R90B



0073 Spicy Orange

NCS: S 3050-Y40R



0070 Rocky Brown

NCS: S 2030-Y30R




0040 Light Sahara

NCS: S 2020-Y20R



0096 Midnight Grey

NCS: S 8000-N



0059 Plumb Grey

NCS: S 7502-B



0053 Ice Grey

NCS: S 4502-B

COLORETTE ACOUSTICPLUS

Comfort | LPX | 4.0mm
Prod. code: 331 | All colors



NCS: S 1070-Y

0001 Banana Yellow




NCS: S 2070-Y50R

0170 Kumquat Orange



NCS: S 2050-R30B

0110 Cadillac Pink




NCS: S 0565-G50Y

0132 Lime Green



NCS: S 2060-B

0123 Poppy Blue



NCS: S 3040-R80B

0004 Bluebird



NCS: S 3005-Y20R

0012 Light Beige



NCS: S 5502-B

0059 Stone Grey



NCS: S 6502-B

0080 Elephant Grey

LINO ART NATURE ACOUSTICPLUS

Comfort | LPX | 4.0mm
Prod. code: 400 | All colors



NCS: S 5500-N


0050 Concrete Grey




NCS: S 4005-Y50R

0043 Pulp Greige

LINOLEUM ACOUSTIC

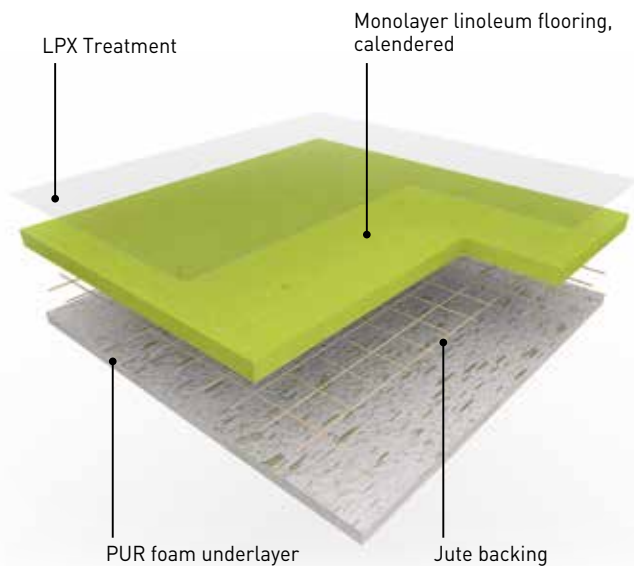

▶ **MARMORETTE ACOUSTICPLUS LPX, COLORETTE ACOUSTICPLUS LPX and LINO ART NATURE ACOUSTIC PLUS LPX** are linoleum acoustic floorcoverings in sheet, 2m wide, providing excellent resistance to wear and tear in high traffic areas. Their weight is 3500gr/sqm. They feature a marbled design (MARMORETTE), a speckled design (COLORETTE) and a striated design (LINO ART NATURE) are composed of natural materials (linseed oil, wood flour, natural resins, cork flour, limestone, color pigments and jute fabric) and a 1.5mm recycled polyurethane foam underlayer, ensuring up to 18dB impact sound reduction. The LPX surface treatment ensures an excellent durability and an easy maintenance. Camouflage and uni welding rods make the connections between the strips invisible. They resist very well to the incandescent cigarette, are antistatic and antibacterial. The flooring is composed of up to 40% recycled content 100% controlled, are REACH compliant and rated C_{fl}-s1 for fire resistance.

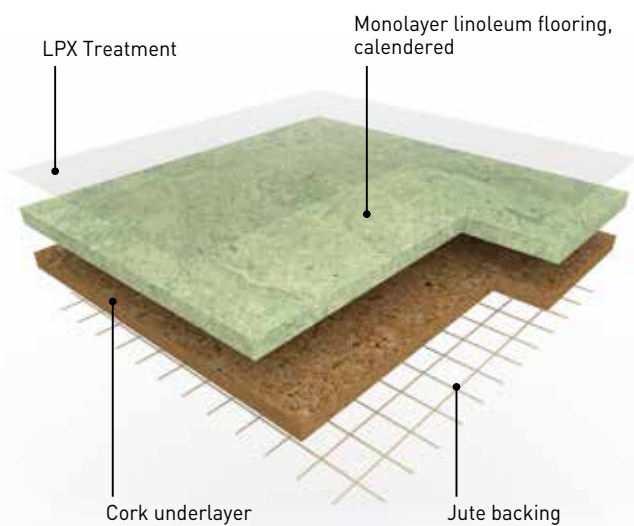



▶ **MARMORETTE ACOUSTIC** is a linoleum acoustic floorcovering in sheet, 2m wide, providing excellent resistance to wear and tear in high traffic areas. It features a marbled design is composed of natural materials (linseed oil, wood flour, natural resins, cork flour, limestone, color pigments and jute fabric) along with a 2.0mm or 3.2mm cork underlayer, ensuring respectively 14dB and 15dB impact sound reduction. The LPX surface treatment ensures an excellent durability and an easy maintenance. Camouflage welding rods make the connections between the strips invisible. It resists very well to the incandescent cigarette, is antistatic and antibacterial. The flooring is composed of up to 40% recycled content 100% controlled, is REACH compliant and rated C_{fl}-s1 for fire resistance.



KORKMENT: CORK ACOUSTIC UNDERLAYER

- 2.0mm underlayer (weight 1.2kg/sqm), 14dB impact sound reduction

0102 Korkment

			MARMORETTE ACOUSTIC PLUS LPX	COLORETTE ACOUSTIC PLUS LPX	LINO ART NATURE ACOUSTIC PLUS LPX	MARMORETTE ACOUSTIC LPX
DESCRIPTION						
Type of flooring	-	-	Linoleum with polyurethane backing EN 686	Linoleum with polyurethane backing EN 686	Linoleum with polyurethane backing EN 686	Linoleum with cork backing EN 687
Pattern	-	-	Marbled	Speckled	Striated design	Marbled
Total thickness	EN ISO 24346 [EN 428]	mm	4.0	4.0	4.0	4.0
Backing	-	-	Polyurethane backing	Polyurethane backing	Polyurethane backing	Cork and jute fabric backing
Thickness of cork / foam backing	EN ISO 24340 [EN 429]	mm	1.5	1.5	1.5	2
Weight	EN ISO 23997 [EN 430]	g/sqm	3500	3500	3500	3900
Width of sheet	EN ISO 24341 [EN 426]	cm	200	200	200	200
Length of sheet	EN ISO 24341 [EN 426]	m	20-31	20-31	20-31	20-31
CLASSIFICATION						
Norm / Product specification	-	-	EN 686	EN 686	EN 686	EN 687
European classification	EN ISO 10874 [EN 685]	class	23 / 33 / 41	23 / 33 / 41	23 / 33 / 41	23 / 33 / 41
Fire rating	EN 13501-1	class	C _{fl} -s1*	C _{fl} -s1*	C _{fl} -s1*	C _{fl} -s1*
Slip resistance	ASR A1.5 / DIN 51130 – BGR 181	class	R9	R9	R9	R9
Dynamic friction coefficient	EN 13893	-	DS (>30)	DS (>30)	DS (>30)	DS (>30)
Impact sound insulation	EN ISO 10140	dB	18 dB	18 dB	18 dB	14 dB
PERFORMANCES						
Residual indentation	EN ISO 24343-1 [EN 433]	mm	≤ 0.30	≤ 0.30	≤ 0.30	≤ 0.40
Colour fastness	EN ISO 105 - B02	degree	≥ 6	≥ 6	≥ 6	≥ 6
Point contact resistance	VDE 0100	kOhm	> 200	> 200	> 200	> 200
Static electrical propensity	EN 1815	kV	app. 2.0	app. 2.0	app. 2.0	app. 2.0
Castor chair test (Type W)	ISO 4918	-	OK	OK	OK	OK
Thermal resistance	EN 12667	sqm,K/W	0.044	0.044	0.044	0.04
Thermal conductivity	EN ISO 10456 [EN 12 524]	W/(m.K)	0.0937	0.0937	0.0937	0.17
Surface treatment	-	-	LPX	LPX	LPX	LPX
Chemical products resistance	EN ISO 26987 [EN 423]	-	Resistance to fat and mineral oil and short term resistance against diluted acids			
Antibacterial activity	JIS Z 2801	-	DLW linoleum has an antibacterial activity			
CE MARKING						
CE	EN 14041 : 2004 AC : 2006	-				
		-				

* Glued according to certificate.

DOP numbers available from your local branch.



Depending on light exposure, the product colour can vary, due to linoleum natural oxidization process. This process is reversible. We recommend that the samples be exposed to sunlight for several hours prior to making a final color choice.

LINOLEUM TECHNIC



LINOLEUM TECHNIC

LINODUR



NCS: S 3502-Y

0056 Marble Grey



NCS: S 3020-B

0020 Spring Blue



NCS: S 8500-N

0081 Sporty Black



NCS: S 4040-R80B

0024 Speckled Blue



NCS: S 2060-Y40R

0072 Peach Orange



NCS: S 2050-G30Y

0011 Avocado Green

LINODUR LCH



NCS: S 3020-B

0020 Spring Blue



NCS: S 3502-Y

0056 Marble Grey

MARMORETTE LCH



NCS: S 4020-P90B


0023 Dusty Blue



NCS: S 4005-R80B

0055 Ash Grey

LINOLEUM TECHNIC

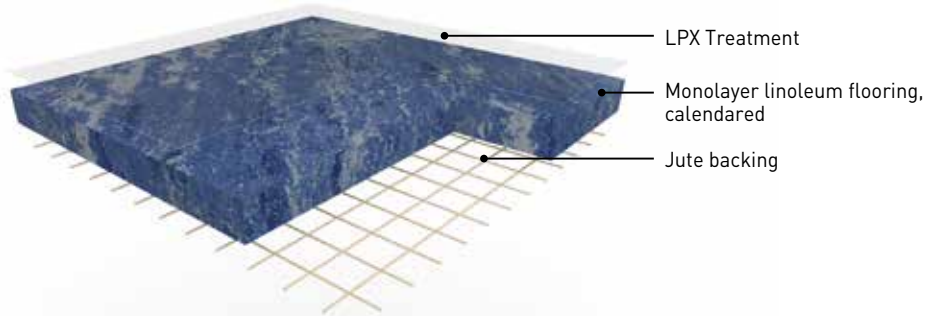





▶ **LINODUR LPX** is a linoleum compact floorcovering in sheet, 4mm width and 2m wide, providing excellent resistance to wear and tear in high traffic areas. Its weight is 4700gr/sqm. It features a moiré design and is composed of natural materials (linseed oil, wood flour, natural resins, cork flour, limestone, color pigments and jute fabric). Its LPX surface treatment ensures an excellent durability and an easy maintenance. The camouflage welding rod makes the connections between the strips invisible. It resists very well to the incandescent cigarette, is antistatic, antibacterial and has been conceived to resist to the passage of heavy trolleys: dynamic load is 30kg/sqm. The flooring is composed of up to 40% recycled content 100% controlled, is REACH compliant and rated C_{fl}-s1 for fire resistance.



▶ **LINODUR LCH LPX** is a linoleum compact dissipative floorcovering in sheet, 4mm width and 2m wide, providing excellent resistance to wear and tear in high traffic areas. Its weight is 4900gr/sqm. It features a moiré design and is composed of natural materials (linseed oil, wood flour, natural resins, cork flour, limestone, color pigments and jute fabric). Its LPX surface treatment ensures an excellent durability and an easy maintenance. The camouflage welding rod makes the connections between the strips invisible. It resists very well to the incandescent cigarette, is antistatic, antibacterial and has been conceived to resist to the passage of heavy trolleys: dynamic load is 30kg/sqm. The flooring is composed of up to 40% recycled content 100% controlled, is REACH compliant and rated C_{fl}-s1 for fire resistance.



▶ **MARMORETTE LCH LPX** is a linoleum compact dissipative floorcovering in sheet, 2m wide, providing excellent resistance to wear and tear in high traffic areas. Its weight is 3000gr/sqm in 2.5mm and 3900gr/sqm in 3.2mm. It features a marbled design and is composed of natural materials (linseed oil, wood flour, natural resins, cork flour, limestone, color pigments and jute fabric). Its LPX surface treatment ensures an excellent durability and an easy maintenance. The camouflage welding rod makes the connections between the strips invisible. It resists very well to the incandescent cigarette, is antistatic and antibacterial. The flooring is composed of up to 40% recycled content 100% controlled, is REACH compliant and rated C_{fl}-s1 for fire resistance.

			LINODUR LPX	MARMORETTE LCH LPX	LINODUR LCH LPX
DESCRIPTION					
Type of flooring	EN ISO 24011 (EN 548)	-	Linoleum with LPX surface treatment	Linoleum with LPX surface treatment	Linoleum with LPX surface treatment
Pattern	-	-	Moiré	Marbled	Moiré
Total thickness	EN ISO 24346 (EN 428)	mm	4.0	2.5 / 3.2	4.0
Backing	-	-	Jute fabric	Jute fabric	Jute fabric
Weight	EN ISO 23997 (EN 430)	g/sqm	4700	3000 / 3900	4900
Width of sheet	EN ISO 24341 (EN 426)	cm	200	200	200
Length of sheet	EN ISO 24341 (EN 426)	m	20-31	20-31	20-31
CLASSIFICATION					
Norm / Product specification	-	-	EN ISO 24011	EN ISO 24011	EN ISO 24011
European classification	EN ISO 10874 (EN 685)	class	23 / 34 / 43	23 / 34 / 42 / 43	23 / 34 / 43
Fire rating	EN 13501-1	class	C _{fl} -s1*	C _{fl} -s1*	C _{fl} -s1*
Slip resistance	ASR A1.5 / DIN 51130 – BGR 181	class	R9	R9	R9
Barefoot slipping	DIN 51097	class	A	-	-
Dynamic friction coefficient	EN 13893	-	DS (>0.30)	DS (>0.30)	DS (>0.30)
Impact sound insulation	EN ISO 10140	dB	6 dB	3 dB / 5 dB	6 dB
PERFORMANCES					
Residual indentation	EN ISO 24343-1 (EN 433)	mm	≤ 0.20	≤ 0.15	≤ 0.20
Colour fastness	EN ISO 105 - B02	degree	≥ 6	≥ 6	≥ 6
Vertical resistance	EN 1081	Ohm	-	≤ 1 x 10 ⁸	≤ 1 x 10 ⁸
Point contact resistance	VDE 0100	kOhm	> 200	> 100	> 100
Static electrical propensity	EN 1815	kV	app. 2.0	app. 2.0	app. 2.0
Castor chair test (Type W)	ISO 4918	-	OK	OK	OK
Thermal resistance	EN 12667	sqm,K/W	0.023	0.015 / 0.018	0.023
Thermal conductivity	EN ISO 10456 (EN 12 524)	W/(m.K)	0.17	0.17	0.17
Surface treatment	-	-	LPX	LPX	LPX
Chemical products resistance	EN ISO 26987 (EN 423)	-	Resistance to fat and mineral oil and short term resistance against diluted acids		
Antibacterial activity	JIS Z 2801	-	DLW linoleum has an antibacterial activity		
CE MARKING					
CE	EN 14041 : 2004 AC : 2006	-		 DS	
		-			

* Glued according to certificate.


DOP numbers available from your local branch.



Depending on light exposure, the product colour can vary, due to linoleum natural oxidization process. This process is reversible. We recommend that the samples be exposed to sunlight for several hours prior to making a final color choice.



LINOLEUM SPORT

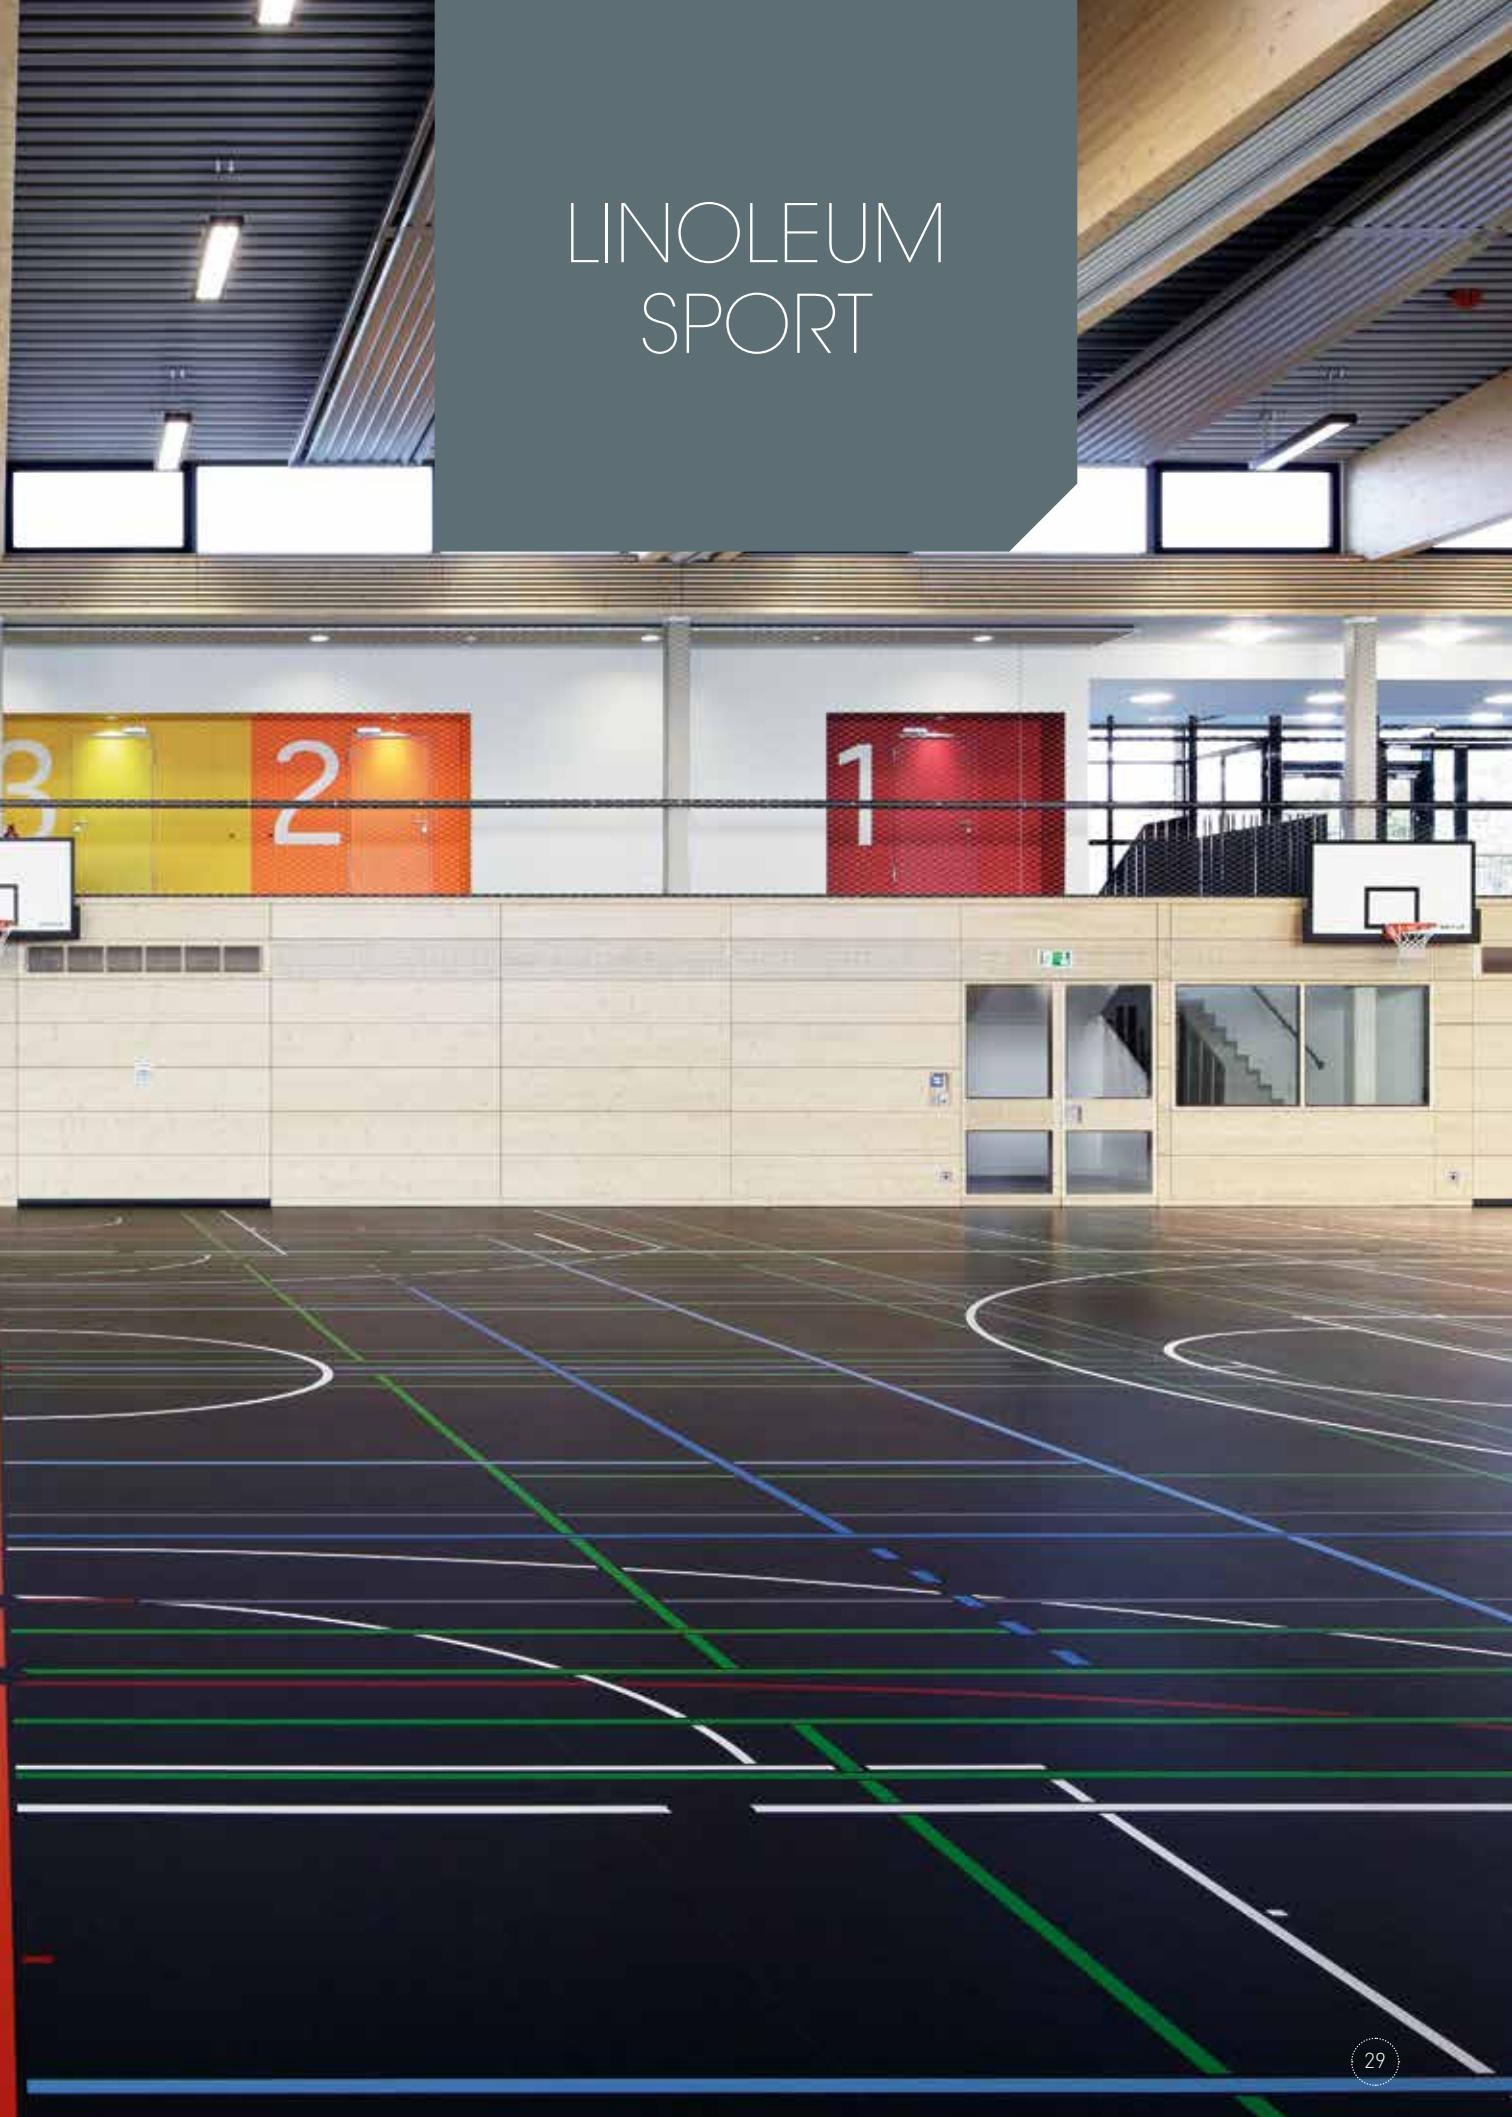

LINOLEUM SPORT

LINODUR SPORT



NCS: S 2050-Y40R

1072 Peach Orange



NCS: S 3010-B70G

1021 Celestial Blue




NCS: S 3502-G

1057 Heaven Blue



NCS: S 2020-Y10R

1051 Skate Beige



NCS: S 1050-Y20R

1074 Straw Yellow




NCS: S 3020-G30Y

1036 Smooth Green



NCS: S 4020-R90B

1020 Spring Blue



NCS: S 2010-Y10R

1042 Stony Brown



NCS: S 2060-Y90R

1013 Lava Red



NCS: S 2050-G30Y

1011 Avocado Green



NCS: S 4030-R80B

1024 Speckled Blue



NCS: S 4000-N

1056 Marble Grey



NCS: S 7502-B

1081 Sporty Black

NATURE SPORT



NCS: S 2020-Y40R

5040 Light Brown


COLORETTE SPORT



4.0mm


All colors

Prod. code: 613



NCS: S 6502-B

1080 Elephant Grey



NCS: S 5502-B

1059 Stone Grey



NCS: S 3005-Y20R

1012 Light Beige



NCS: S 3040-R80B

1004 Bluebird



NCS: S 0580-Y90R

1118 Power Red



NCS: S 1070-Y30R

1171 Sunrise Orange



NCS: S 1070-Y

1001 Banana Yellow




NCS: S 0565-G50Y

1132 Lime Green



LINOLEUM SPORT

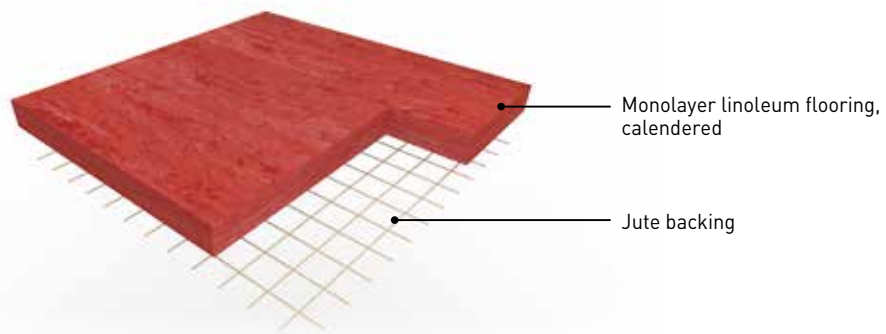

4.0mm

▶ **COLORETTE, LINODUR** and **NATURE SPORT** are linoleum compact floorcovering in sheet, 2m wide and 4mm thick. Their weight is 4700gr/sqm. It features a speckled design (COLORETTE), a moire design (LINODUR), or random striped design in tonal colours (NATURE SPORT) and are composed of natural materials (linseed oil, wood flour, natural resins, cork flour, limestone, color pigments and jute fabric). They resist very well to the incandescent cigarette, are antistatic, antibacterial and rated C_{fl}-s1 for fire resistance.



			LINODUR SPORT	COLORETTE SPORT	NATURE SPORT
DESCRIPTION					
Type of flooring	EN ISO 24011 [EN 548]	-	Linoleum	Linoleum	Linoleum
Pattern	-	-	Moiré	Speckled	Striated design (wood effect)
Total thickness	EN ISO 24346 [EN 428]	mm	4.0	4.0	4.0
Backing	-	-	Jute fabric	Jute fabric	Jute fabric
Weight	EN ISO 23997 [EN 430]	g/sq.m	4700	4700	4700
Width of sheet	EN ISO 24341 [EN 426]	cm	200	200	200
Length of sheet	EN ISO 24341 [EN 426]	m	app. 28	app. 28	app. 28
CLASSIFICATION					
Norm / Product specification	-	-	EN 14904 / DIN 18032-2	EN 14904 / DIN 18032-2	EN 14904 / DIN 18032-2
European classification	EN ISO 10874 [EN 685]	class	23 / 34 / 43	23 / 34 / 43	23 / 34 / 43
Fire rating	EN 13501-1	class	C _{fl} -s1*	C _{fl} -s1*	C _{fl} -s1*
Dynamic friction coefficient	DIN 18032-2	-	0.4 - 0.6 μ - Fulfilled	0.4 - 0.6 μ - Fulfilled	0.4 - 0.6 μ - Fulfilled
Friction	EN 14904	-	80-110 - Fulfilled	80-110 - Fulfilled	80-110 - Fulfilled
Impact sound insulation	EN ISO 10140	dB	6 dB	6 dB	6 dB
PERFORMANCES					
Residual indentation	EN ISO 24343-1 [EN 433]	mm	\leq 0.20	\leq 0.20	\leq 0.20
Colour fastness	EN ISO 105 - B02	degree	\geq 6	\geq 6	\geq 6
Light reflexion	DIN 5036-3	-	p \geq 0.20 fulfilled (excepted colours 0024 and 0081)	p \geq 0.20 fulfilled (excepted colours 0004 and 0080)	p \geq 0.20 fulfilled
Static electrical propensity	EN 1815	kV	app. 2.0	app. 2.0	app. 2.0
Castor chair test (Type W)	ISO 4918	-	OK	OK	OK
Thermal resistance	EN 12667	sqm,K/W	0.023	0.023	0.023
Thermal conductivity	EN ISO 10456 [EN 12 524]	W/(m.K)	0.17	0.17	0.17
Chemical products resistance	EN ISO 26987 [EN 423]	-	Resistance to fat and mineral oil and short term resistance against diluted acids		
Antibacterial activity	JIS Z 2801	-	DLW linoleum has an antibacterial activity		
CE MARKING					
CE	EN 14904 : 2006	-			
		-			

* Glued according to certificate.

DOP numbers available from your local branch.

Depending on light exposure, the product colour can vary, due to linoleum natural oxidization process. This process is reversible. We recommend that the samples be exposed to sunlight for several hours prior to making a final color choice.

FINISHES


Color code	Color name	Uni welding rod	Camouflage welding rod
COMPACT			
MARMORETTE			
0020	MILD GREEN	1700020	6100020
0022	AUTUMN BLUE	1200022	6100022
0023	DUSTY BLUE	1200023	6100023
0026	SKY BLUE	1200024	6100026
0040	LIGHT SAHARA	1200070	6100040
0043	LEAF GREEN	1000032	6100043
0045	SAND BEIGE	1200045	6100045
0048	CRANBERRY RED	1200048	6100048
0049	ROYAL BLUE	1200049	6100049
0050	QUARTZ GREY	1200050	6100050
0052	FLINT GREY	1200052	6100052
0053	ICE GREY	1300056	6100053
0055	ASH GREY	1300052	6100055
0056	FOGGY BLUE	1200058	6100056
0059	PLUMB GREY	1300080	6100059
0070	ROCKY BROWN	1000070	6100070
0072	GOLDEN YELLOW	1200072	6100072
0073	SPICY ORANGE	1200073	6100073
0075	LIGHT AURORA	1200075	6100075
0076	PALE YELLOW	1200076	6100076
0096	MIDNIGHT GREY	1700096	6100096
0098	DESERT BEIGE	1700098	6100098
0099	GREY TURQUOISE	1700099	6100099
0100	FROG GREEN	1700011	6100100
0115	RUSTY ORANGE	1200005	6100115
0003	DARK BROWN	1700003	6100003
0008	CHESTNUT	1700008	6100008
0018	LOBSTER RED	1700018	6100018
0019	SUNSET ORANGE	1200019	6100019
0130	ANTIQUE GREEN	1200056	6100130
0146	BEESWAX BEIGE	1200071	6100146
0148	INK BLUE	1200082	6100148
0155	SMOKED PEARL	1200055	6100155
0132	LIME GREEN	1200132	6100132
0108	MOKKA BROWN	1200108	6100108
0117	MANDARIN ORANGE	1200117	6100117
0118	CHILI RED	1200118	6100118
0119	TERRACOTTA	1200119	6100119
0129	CURACAO PETROL	1200129	6100129
0140	LEATHER BROWN	1200140	6100140
0041	AVOCADO GREEN	1200041	6100041
0145	BANANA WHITE	1200145	6100145
0149	DARK BLUE	1200149	6100149
0158	TABAC GREY	1200158	6100158
0159	ALUMINO GREY	1200159	6100159
0160	INDUSTRIAL GREY	1200160	6100160
0172	PAPAYA ORANGE	1200172	6100172
0173	MELON ORANGE	1200173	6100173
0174	PHYSALIS ORANGE	1200174	6100174
0180	CARBON GREY	1200180	6100180
COLORETTE			
0001	BANANA YELLOW	1300001	
0110	CADILLAC PINK	1300110	
0171	SUNRISE ORANGE	1300171	
0170	KUMQUAT ORANGE	1300170	
0118	POWER RED	1300118	
0132	LIME GREEN	1300132	
0123	POPPY BLUE	1300123	
0016	DEEP ORANGE	1300016	
0004	BLUEBIRD	1300004	
0006	VIVID GREEN	1300006	
0012	LIGHT BEIGE	1300050	
0043	LIGHT MUD	1300002	
0052	OXID GREY	1300020	
0059	STONE GREY	1300059	
0071	STRAW BEIGE	1300071	

Color code	Color name	Uni welding rod	Camouflage welding rod
0073	SAND YELLOW	1300015	
0080	ELEPHANT GREY	1300080	
0081	PRIVATE BLACK	1300021	
0058	ALUMINIUM GREY	1300052	
GRANETTE			
0151	ASPHALT GREY	1100067	6200151
0152	CEMENT GREY	1100068	6200152
0153	METAL GREY	1100069	6200153
0057	LIGHT STONE	1100053	6200057
0058	COAL BLACK	1200080	6200058
0059	GRAPHITE GREY	1300080	6200049
0064	STONE BEIGE	1100060	6200064
0065	CASHMERE BROWN	1100061	6200065
0066	TERRA BROWN	1100062	6200066
LINO ART METALLIC			
0080	FIRMAMENT BLACK	1400280	
0060	BRONZE WARM BROWN		6600260
0083	ALUMINO LIGHT GREY		6600283
LINO ART NATURE			
0040	MAPLE BEIGE		6600040
0041	SAND BEIGE		6600041
0063	ALDER BROWN		6600063
0064	OAK BROWN		6600064
0067	WALNUT BROWN		6600067
LINO ART STAR			
0080	BLACK	1400480	
0083	LIGHT GREY	1400483	
0085	MID GREY	1400485	
0001	LEMON YELLOW	1500006	
0020	AQUA TURQUOISE	1500001	
0030	LIME GREEN	1500004	
0059	CONCRETE GREY	1500059	
0075	APRICOT	1500075	
LINO ART URBAN			
0550	BETON SOFT GREY	1200550	
0551	FLASHY ASPHALT GREY	1200551	
0552	SILVER GREY	1200552	
0553	DARK CONCRETE GREY	1200553	
0554	CONCRETE GREY	1200554	
0555	FLASHY STREET GREY	1200555	
0556	MUD GREY	1200556	
0557	URBAN GREY	1200557	
0558	SCREED GREY	1200558	
0559	VINTAGE GREY	1200559	
0560	BOLD GREY	1200560	
0561	PITCH BLACK	1200561	
UNI WALTON			
0082	BROKEN GREY	1000003	
0083	INDUSTRIAL GREY	1000004	
0085	WARM CONCRETE GREY	1000085	
0088	CHESTNUT	1000088	
0010	POMPEJI RED	1500010	
0035	RACING GREEN	1000035	
0043	NEUTRAL BEIGE	1000043	
0058	DARK CONCRETE GREY	1000158	
0059	FROST GREY	1000059	
0060	DEEP BROWN	1000060	
0062	TERRACOTTA	1000010	
0080	BLACK	1200080	
0081	NICKEL GREY	1000002	
ACOUSTIC			
COLORETTE ACOUSTIC PLUS			
0001	BANANA YELLOW	1300001	
0012	LIGHT BEIGE	1300050	
0059	STONE GREY	1300059	
0004	BLUEBIRD	1300004	
0110	CADILLAC PINK	1300110	
0123	POPPY BLUE	1300123	

Color code	Color name	Uni welding rod	Camouflage welding rod
0170	KUMQUAT ORANGE	1300170	
0080	ELEPHANT GREY	1300080	
0132	LIME GREEN	1300132	
MARMORETTE ACOUSTIC PLUS			
0096	MIDNIGHT GREY	1700096	6100096
0130	ANTIQUE GREEN	1200056	6100130
0022	AUTUMN BLUE	1200022	6100022
0129	CURACAO PETROL	1200129	6100129
0040	LIGHT SAHARA	1200070	6100040
0053	ICE GREY	1300056	6100053
0059	PLUMB GREY	1300080	6100059
0070	ROCKY BROWN	1000070	6100070
0073	SPICY ORANGE	1200073	6100073
LINOART NATURE ACOUSTIC PLUS			
0043	PULP GREIGE		6600043
0050	CONCRETE GREY		6600050
MARMORETTE ACOUSTIC			
0019	SUNSET ORANGE	1200019	6100019
0023	DUSTY BLUE	1200023	6100023
0045	SAND BEIGE	1200045	6100045
0053	ICE GREY	1300056	6100053
0059	PLUMB GREY	1300080	6100059
0098	DESERT BEIGE	1700098	6100098
TECHNIC			
LINODUR			
0020	SPRING BLUE	1500021	6200520
0024	SPECKLED BLUE	1300028	6200554
0056	MARBLE GREY	1500056	6200556
0072	PEACH ORANGE	1200073	6200572
0011	AVOCADO GREEN	1500011	6200511
0081	SPORTY BLACK	1500081	6200581
LINODUR LCH			
0020	SPRING BLUE	1500021	6200520
0056	MARBLE GREY	1500056	6200556
MARMORETTE LCH			
0023	DUSTY BLUE	1200023	6100023
0055	ASH GREY	1300052	6100055
SPORT			
LINODUR SPORT			
1013	LAVA RED		6200513
1020	SPRING BLUE		6200520
1042	STONY BROWN		6200542
1056	MARBLE GREY		6200556
1021	CELESTIAL BLUE		6200521
1036	SMOOTH GREEN		6200536
1057	HEAVEN BLUE		6200557
1081	SPORTY BLACK		6200581
1051	SKATE BEIGE		6200551
1072	PEACH ORANGE		6200572
1074	STRAW YELLOW		6200574
1024	SPECKLED BLUE		6200524
1011	AVOCADO GREEN		6200511
COLORETTE SPORT			
1132	LIME GREEN	1300132	
1080	ELEPHANT GREY	1300080	
1059	STONE GREY	1300059	
1012	LIGHT BEIGE	1300050	
1004	BLUEBIRD	1300004	
1118	POWER RED	1300118	
1171	SUNRISE ORANGE	1300171	
1001	BANANA YELLOW	1300001	
NATURE SPORT			
5040	LIGHT BROWN		6600040

FINISHES

COVING SOLUTIONS



4012 - 4014



Color: 6512


PVC COVE FORMER

This accessory allows the floor-wall cove to be formed


- ▶ Its rounded shape **makes it easier to clean** the floor-wall junction.
- ▶ Gives a better look
- ▶ Limits the risk of piercing the floor covering
- ▶ **Prevents accumulation** of dirt and bacteria

TIPS: Use a mitre shear for a perfect cut

4012



4014




Packaging

30 x 2 lm strips.

Colours and images are not contractual.



HOLLOW GROOVE SKIRTING HSLA

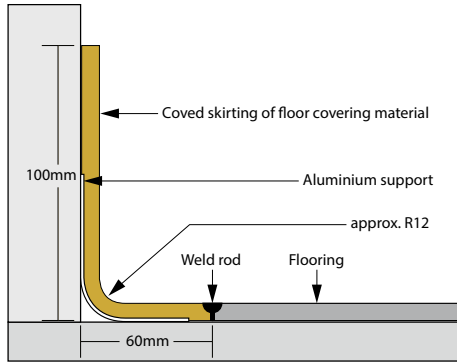

- ▶ HSLA is a solution of flooring strengthened by an aluminum backing which will be delivered already combined from Gerflor DLW Flooring.
- ▶ The HSLA is very aesthetic because of its narrow radius
- ▶ Easy to clean.
- ▶ Can be used on any types of subfloors and as well for vinyl as for linoleum flooring up to 3.2 mm thickness.

	Code
Compact 2.0mm	8009999
Compact 2.5mm	8019999
Compact 3.2mm	8029999
Conductive (LCH)	8049999



CLEANING LINOLEUM FLOORS

MARMORETTE / COLORETTE / GRANETTE / UNI WALTON / LINO ART / LINODUR



Damp sweeping equipment

Flexible mop preferably fitted with disposable, antistatic and/or pre-impregnated gauze strips



Mechanical cleaning equipment

Auto scrubber, rotocleaner or single-brush machine

















Mechanical cleaning disk

3M (or equivalent) colour disks



Single disk machine

	EQUIPMENT USED	CLEANING PRODUCTS	CLEANING METHODS
Initial treatment	 Manual cleaning OR   Mechanical cleaning	Neutral or alcohol detergent (pH <9)	<ul style="list-style-type: none"> • Damp sweeping • Mechanical washing with red disk at 160 - 180 rpm (with water recovery) <ul style="list-style-type: none"> • Rinsing • Application of redispersible detergent <ul style="list-style-type: none"> • Dry polishing (300 - 100 rpm)
Daily cleaning	 Manual cleaning OR   Mechanical cleaning	Neutral or alcohol detergent (PUR) Floor maintainer (LPX)	<ul style="list-style-type: none"> • Damp sweeping • Mechanical washing with red disk at 160 - 180 rpm (with water recovery)
Weekly cleaning	  Mechanical cleaning	Cleaner spray	<ul style="list-style-type: none"> • Spray buffing with red or beige disk at 300 - 1000 rpm
Deep cleaning	 Manual cleaning OR   Mechanical cleaning	Intensive clean agent (pH <9)	<ul style="list-style-type: none"> • Damp sweeping • Mechanical washing with red disk at 160 - 180 rpm (with water recovery) <ul style="list-style-type: none"> • Rinsing • Application of redispersible detergent with red disk <ul style="list-style-type: none"> • Dry polishing
Reconditioning	 LPX Floors  	Stripper for linoleum (pH <9) Acrylic emulsion	<ul style="list-style-type: none"> • Damp sweeping <ul style="list-style-type: none"> • Stripping • Rinsing • Application of acrylic emulsion in 3 crossed layers, respecting the drying time between each layers

These cleaning instructions have to be adapted depending on traffic and location of the area.



Gerflor DLW flooring products are to be installed in full accordance with Gerflor DLW installation instructions and recognized trade standards.

An effective, regular cleaning and maintenance program is vital for retaining a high appearance level. Gerflor DLW flooring products should only be used as floorcoverings.

Note: Gerflor DLW reserve the right to amend this specification without giving prior notice. For the latest versions of the technical specifications, check our website: www.gerflor.com

**INSTALLATION
& MAINTENANCE
GUIDELINES
AVAILABLE ON**



Gerflor International

Tel: +33 (0)4 74 05 40 00

Fax: +33 (0)4 74 05 03 13

e-mail: gerflorcontract@gerflor.com

gerflor.com

ARCHITECTURE
DECORATION
SPORT
TECHNOSPECIFIC

Gerflor Don't forget our complementary ranges!



Handrails



Wall Coverings
& Protections



Entrance mats



Skirtings
& Profiles

Gerflor

Be connected!



www.gerflor.com

#Gerflor

GERFLOR, **ACTIONS SPEAK LOUDER THAN WORDS**



COMPOSITION

98% organic

80% renewable (linseed oil, wood powder, cork, resins, jute)

100% REACH compliant



**RECYCLED
CONTENT**

Up to 40% recycled content



LCA

Eco designed according to a product specific life cycle analysis

Manufactured in a iso 14001 certified site



WELLNESS

Antibacterial activity

Walking comfort

Photo credits: Gerflor - Realisation: Cocco & Co - 11/2018 - 2004 5261 - Indicative documentation Cost: 5€